AA297

Fasson ®

PP NG TOP WHITE OPQ S2045N-BG40WH FSC

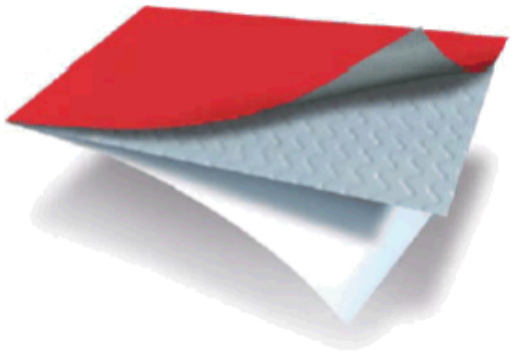

Facestock

A bi-axially oriented, gloss polypropylene film with a print-receptive top coating and black opaque coating on the back side.

Basis Weight	43 g/m²	ISO 536
Caliper	57 µm	ISO 534

Adhesive

A general purpose permanent, rubber based adhesive.

Liner

BG40 white, a supercalendered glassine paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	57 g/m²	ISO 536
Caliper	50 µm	ISO 534

Laminate

Total Caliper	126 µm±10%	ISO 534

Performance Data

Initial Tack	18 N/25mm	FTM 9 Glass
Peel Adhesion 90°	9 N/25mm	FTM 2 St.St.
Min. Application Temp.	0 °C	
Service Temperature	-40 °C to 70 °C	

Adhesive Performance

The adhesive features excellent tack and adhesion on a wide variety of substrates, including apolar, slightly rough and curved substrates. Particularly good performance at lower temperatures, e.g. labeling of chilled products.

Applications and Use

Labels for cosmetics and toiletries, household chemicals, appliances, toys, etc. Promotional labels and stickers for indoor and outdoor use.

Conversion and Printing

Can be printed by letterpress, screen, flexo and gravure, using UV-, solvent- or water-based inks.

Compliance and Approvals

The adhesive S2045N is suitable for contact with dry and moist, non-fatty foodstuffs in this construction. For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.

Adhesive S2045N has attained the two star certification for biobased content according to EN 16640, meaning that S2045N contains certified Biobased Carbon Content of at least 40%. (TÜV AUSTRIA licensee number: S0259)

OK biobased | TÜV AUSTRIA ★★ S0259

*The OK biobased certification is only applicable to the adhesive S2045N.

PP NG TOP WHITE OPQ	
S2045N	
BG40WH FSC	

FSC www.fsc.org FSC® C004451

The mark of responsible forestry

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.
If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty
All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see http://terms.europe.averydennison.com

©2026 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.