

Facestock

A metallized polyester film, provided with a print friendly chrome finish top-coat.

Caliper	36 µm	ISO 534
---------	-------	---------

Adhesive

A permanent, acrylic based adhesive.

Liner

BG45 white FSC is a supercalendered glassine paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	72 g/m²	ISO 536
--------------	---------	---------

Caliper	63 µm	ISO 534
---------	-------	---------

Laminate

Total Caliper	118 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	14.5 N/25mm	FTM 9 Glass
--------------	-------------	-------------

Peel Adhesion 90°	9 N/25mm	FTM 2 St.St.
-------------------	----------	--------------

Min. Application Temp.	5 °C
------------------------	------

Service Temperature	-40 °C to 90 °C
---------------------	-----------------

Adhesive Performance

The adhesive is perfectly suitable for uses that need a good resistance to UV, fats or solvents. Good general adhesion performance on a wide range of substrates.

Applications and Use

Attractive labels of very good quality for indoor and outdoor use. Applications include decorative labels for durable products and cosmetics.

Conversion and Printing

The ink receptive coating allows good wettability and ink adhesion with letterpress, offset, flexo, gravure and hot foil stamping. Precautions should be taken to avoid build-up of static electricity.


Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

AA507

Fasson ®

PET36 TOP CHROME
S697-BG45WH FSC

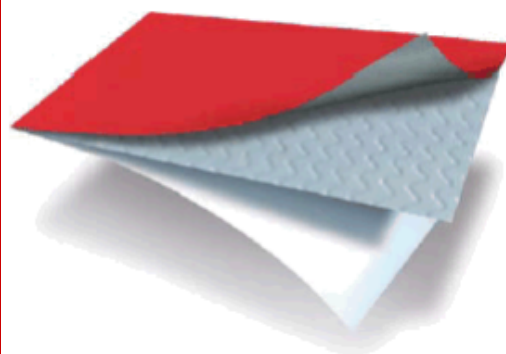

PET36 TOP CHROME

S697

BG45WH FSC



The mark of
responsible forestry

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2025 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.