

### Facestock

A gloss white polyester film. The smooth surface is print treated to achieve good TT printability and ink anchorage.

Basis Weight	71 g/m <sup>2</sup>	ISO 536
Caliper	50 µm	ISO 534

### Adhesive

S8020 is a clear permanent adhesive featuring excellent UV resistance and weatherability together with good overall adhesion performance.

### Liner

BG42 white, a supercalendered glassine paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	62 g/m <sup>2</sup>	ISO 536
Caliper	55 µm	ISO 534
Transparency	50 %	DIN 53147

### Laminate

Total Caliper	125 µm±10%	ISO 534
---------------	------------	---------

### Performance Data

Initial Tack	7.5 N/25mm	FTM 9 glass FINAT FTM 9 (vidro)
Peel Adhesion 90°	9.5 N/25mm	FTM2 st.st. 24 hrs.
Min. Application Temp.	5 °C	
Service Temperature	-40 °C to 150 °C	
Adhesive Coat Weight	20 g/m <sup>2</sup>	FTM12
Adhesive Type	Emulsion Acrylic	

### Adhesive Performance

The adhesive S8020 features excellent temperature and UV resistance as well as weatherability. This general purpose adhesive offers good peel adhesion values on high and medium surface energy substrates.

### Applications and Use

Transfer PET White PT is specifically developed for Durable Goods labelling. Typical examples are identification and warning labels on electronic devices and household appliances.

The main area of application for this product is the labelling of industrial products, for example in the electronics and appliance market. Nameplates and logistics labels are typical examples.

### Conversion and Printing

The glossy, smooth surface is print treated and can be thermal transfer printed, the best results can be obtained with resin ribbons. This product is qualified by EFI Jetrion and Durst for UV inkjet printing. It can be printed by all conventional print technologies.


### Compliance and Approvals

This product is UL and C-UL recognized (UL 969, CSA C22.2 No. 0.15). The UL file number is MH27538.

## AA639

## Fasson®

### TRANSFER PET WHITE PT S8020-BG42WH FSC

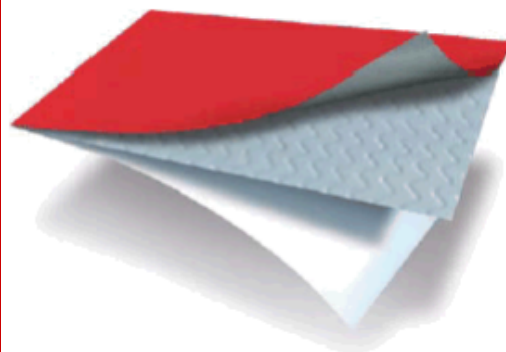

TRANSFER PETWH PT

S8020

BG42WH FSC



The mark of  
responsible forestry

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

### Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

## Appendix

### UL and CSA recognition

This product meets the requirements as stated in UL 969 and CSA C22.2 No. 0.15 for indoor use. The UL file number is MH27538. For specific information on approved conditions, see appendix.

## Performance Data

Note: the following technical data should be considered representative or typical only and should not be used for specification purposes.

### Peel Adhesion:

FTM1: 180°, 300 mm/min, dwell time: 48 hours

Surface	N/25mm
ABS	9,5
Aluminium	9,5
Automotive lacquered panels	8,0
Glass	10,5
HDPE	4,5
LDPE	4,5
PA6	9,0
Stainless Steel	11,0

### Chemical Resistance:

The performance results are based on 4 hours immersions at room temperature unless otherwise noted. Samples were applied to the test panel and conditioned for 24 hours before immersion and evaluated immediately upon removal. Peel adhesion was measured according to FTM1.

Chemical	Test Substrate	N/25mm	Visual appearance	Edge Penetration
Ad Blue	Aluminium	8,9	No change	1 mm
Biodiesel	Glass	10,1	No change	0 mm
Bioethanol E85	Glass	8,4	No change	2 mm
Brake Fluid	Glass	9,8	No change	0 mm
Diesel	Glass	8,6	No change	0 mm
Engine Oil	Glass	9,5	No change	0 mm
Gasoline	Glass	6,8	No change	3 mm
Heptane	Glass	7,2	No change	3 mm
Water, distilled	Aluminium	8,1	No change	3 mm

**Chemicals:** Ad Blue: Aral, Bioethanol E85: CropEnergies CropPower85, Brake Fluid: DOT 4 Synthetic (One Way) Diesel: TOTAL, Engine Oil: TOTAL quartz 700, 10 W 40, Gasoline: TOTAL Euro 95

## Appendix

### Thermal Transfer Printing:

#### Printability – Physical Resistance

Flat head printers (tests were performed with the printer Zebra XII 140):

Ribbon	Settings		Print Quality	ANSI Grade	Scratch resistance	Tape resistance
	speed	energy				
Armor AXR7+	3	20	++	B	++	++
Dai Nippon R300	4	15	++	A	++	++
Dai Nippon R510	2	20	++	A	++	++
Ricoh B110Cx	3	10	+	A	++	++

Near edge printers (tests were performed with the printer Avery TTX 450 – Near Edge):

Ribbon	Settings	Print Quality	ANSI Grade	Scratch resistance	Tape resistance
Armor AXR 600	4 "/s	o	D	++	o
Armor AXR 800	4 "/s	++	C	++	-
Ricoh B120 E	4 "/s	++	C	++	++

ANSI (American National Standards Institute) Grade: information about barcode quality

A: excellent B: good C: acceptable D: readable with difficulty

++: excellent +: good o: acceptable -: poor

#### Chemical Resistance

The printed samples were wetted on the surface with a soft clean cotton cloth soaked in the test solution by wiping 10 times back and forth with light pressure. After 5 seconds they were dried with a clean dry soft cloth. After 15 minutes the evaluation took place.

	AXR7+	R300	R510	B110Cx	AXR600	AXR800	B120 E
Ad Blue	+	+	+	+	+	+	+
Anti-Freeze	+	+	+	+	+	+	+
Biodiesel	+	+	+	+	-	-	-
Bioethanol E85	-	+	+	-	-	-	-
Brake fluid	-	o	+	+	-	-	-
Cleaner solvent	o	+	+	+	+	+	+
Engine oil	+	+	+	+	-	-	-
Gasoline	-	-	+	-	-	-	-
Hard wax polish	-	o	+	-	-	-	-
Isopropanol	o	+	+	o	-	o	-

+: good (no change) o: acceptable (minor change, still readable) -: poor

#### Chemicals:

Ad Blue: Aral, Anti-Freeze: Speedfrost "Speedfroil" 1:1 in water, Bioethanol E85: CropEnergies CropPower85

Brake Fluid: DOT 4 Synthetic (One Way), Cleaner Solvent: "Caramba" Cold Cleaner, Engine Oil: TOTAL quartz 700, 10 W 40

Gasoline: TOTAL Euro 95, Hard Wax Polish: „Nigrin“ Hard Wax Polish

## Appendix

### Compliance Data

#### UL – Underwriters Laboratories (UL 969, Category PGJ12)

File Number: MH27538, Category PGJ12

This material is UL recognized for indoor use where exposed to high humidity or occasional exposure to water.

Application Surface	Max Temp (°C)	Min Temp (°C)
Alkyd paint	150	-40
Aluminum	150	-40
Galvanized steel	150	-40
Stainless steel	150	-40
Nylon - Polyamide	100	-40
Polycarbonate	100	-40
Acrylonitrile butadiene styrene (ABS)	80	-40

The UL certification includes the printing with the following thermal transfer ribbons:

Armor	AXR 600, AXR 7+
Dainippon	R300, R510
limak	SP-330
Italgrafica	TF335P
Ricoh	B110C, B110CX
Sony Chemicals	TR5075

#### CSA – Canadian Standards Association

UL has tested this product according to the requirements described in CSA C22.2 No. 0.15.

This product is C-UL recognized for indoor use.

The details are listed in the UL file number MH27538, Category PGJ18.

Group	Application Surface	Max. Temperature (°C)
Metals	Bare, plated or enamelled steel; bare, anodized or enamelled aluminium	+125
Plastic Group III	Polycarbonate, acetates, acrylics	+80
Plastic Group V	Polyamide, polyimide	+80
Plastic Group VI	ABS, styrene, styrene acrylonitrile	+80

The C-UL certification includes the printing with the following thermal transfer ribbons:

Dainippon	R300, R510
limak	SP-330
Ricoh	B110CX

## Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000

### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2026 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.