

Facestock

A white polyester film; the surface is covered with an absorbing, matt topcoat for very good ink anchorage.

Basis Weight	74 g/m ²	ISO 536
Caliper	55 µm	ISO 534

Adhesive

S8020 is a clear permanent adhesive featuring excellent UV resistance and weatherability together with good overall adhesion performance.

Liner

BG42 white, a supercalendered glassine paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	62 g/m ²	ISO 536
Caliper	55 µm	ISO 534
Transparency	50 %	DIN 53147

Laminate

Total Caliper	125 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	7.5 N/25mm	FTM 9 glass FINAT FTM 9 (vidro)
Peel Adhesion 90°	9.5 N/25mm	FTM2 st.st. 24 hrs.
Min. Application Temp.	5 °C	
Service Temperature	-40 °C to 150 °C	
Adhesive Coat Weight	20 g/m ²	FTM12
Adhesive Type	Emulsion Acrylic	

Adhesive Performance

The adhesive S8020 features excellent temperature and UV resistance as well as weatherability. This general purpose adhesive offers good peel adhesion values on high and medium surface energy substrates.

Applications and Use


Transfer PET matt white was specially developed for labels on Durables Goods, especially in the automotive industry, but also in other segments. Identification labels and logistical labels are the main applications. When printed with high quality thermal transfer ribbons, very high chemical resistance of the print can be achieved.

The main area of application for this product is the labelling of industrial products, for example in the electronics and appliance market. Nameplates and logistics labels are typical examples.

AA643

Fasson ®

TRANSFER PET MATT WHITE S8020-BG42WH FSC

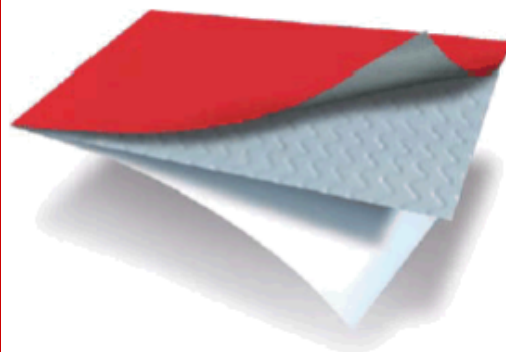

TRANSFER PET MATT
WHITE

S8020

BG42WH FSC



The mark of
responsible forestry

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Conversion and Printing

Thanks to the special surface coating, excellent results can be achieved with thermal transfer printers equipped with conventional or near-edge print heads and using either wax/resin or pure resin ribbons. In addition the product can also be printed by all conventional roll label techniques, such as flexo, UV letterpress, silkscreen. Specific testing is required. For easy diecutting sharp corners should be avoided.

Compliance and Approvals

Sustainable alternative: This material is available with 70% recycled content in the face material under a *different product code*.

This product is UL and C-UL recognized (UL 969, CSA C22.2 No. 0.15). The UL file number is MH27538.

Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

Appendix

UL recognition

This product meets the requirements as stated in UL 969, and is UL recognized for indoor and outdoor use. The UL file number is MH27538. For specific information on approved conditions, see appendix.

Performance Data

Note: the following technical data should be considered representative or typical only and should not be used for specification purposes.

Peel Adhesion:

FTM1: 180°, 300 mm/min, dwell time: 48 hours

Surface	N/25mm
ABS	9,5
Aluminium	9,5
Automotive lacquered panels	8,0
Glass	10,5
HDPE	4,5
LDPE	4,5
PA6	9,0
Stainless Steel	11,0

Chemical Resistance:

The performance results are based on 4 hours immersions at room temperature unless otherwise noted. Samples were applied to the test panel and conditioned for 24 hours before immersion and evaluated immediately upon removal. Peel adhesion was measured according to FTM1.

Chemical	Test Substrate	N/25mm	Visual appearance	Edge Penetration
Ad Blue	Aluminium	8,9	No change	1 mm
Biodiesel	Glass	10,1	No change	0 mm
Bioethanol E85	Glass	8,4	No change	2 mm
Brake Fluid	Glass	9,8	No change	0 mm
Diesel	Glass	8,6	No change	0 mm
Engine Oil	Glass	9,5	No change	0 mm
Gasoline	Glass	6,8	No change	3 mm
Heptane	Glass	7,2	No change	3 mm
Water, distilled	Aluminium	8,1	No change	3 mm

Chemicals: Ad Blue: Aral, Bioethanol E85: CropEnergies CropPower85, Brake Fluid: DOT 4 Synthetic (One Way)
Diesel: TOTAL, Engine Oil: TOTAL quartz 700, 10 W 40, Gasoline: TOTAL Euro 95

Appendix

Thermal Transfer Printing:

Printability – Physical Resistance

Flat head printers (tests were performed with the printer Zebra XII 140):

Ribbon	Settings speed energy		Print Quality	ANSI Grade	Scratch resistance	Tape resistance
inkanto AXR7+	4	15	+	A	++	++
DNP R300	3	15	++	A	++	+
limak SP330	3	15	++	A	++	o
ITW B324	3	15	+	A	++	o
Ricoh B110A	5	15	++	A	++	++
Ricoh B110CX	3	15	+	A	++	++

Near edge printers (tests were performed with the printer Avery TTX 450 – Near Edge):

Ribbon	Settings	Print Quality	ANSI Grade	Scratch resistance	Tape resistance
inkanto APR 600	4 "/s	o	C	++	-
DNP TR4500	4 "/s	++	B	++	-
Ricoh B120 Ex2	4 "/s	+	B	++	-

ANSI (American National Standards Institute) Grade: information about barcode quality

A: excellent B: good C: acceptable D: readable with difficulty

++: excellent +: good o: acceptable -: poor

Chemical Resistance

The printed samples were wetted on the surface with a soft clean cotton cloth soaked in the test solution by wiping 10 times back and forth with light pressure. After 5 seconds they were dried with a clean dry soft cloth. After 15 minutes the evaluation took place.

	AXR7+	R300	SP330	B324	B110A	B110 CX	APR 600	TR 4500	B120E
Ad Blue	+	+	+	+	+	+	+	+	+
Anti-Freeze	+	+	+	+	+	+	o	o	o
Biodiesel	+	+	+	+	o	+	-	-	-
Bioethanol E85	+	+	+	+	o	+	-	-	-
Brake fluid	o	o	+	+	o	o	o	o	o
Cleaner solvent	+	+	+	+	+	+	-	-	-
Engine oil	+	+	+	+	+	+	+	+	+
Gasoline	o	o	o	o	o	o	-	-	-
Hard wax polish	+	+	+	+	+	o	-	-	-
Isopropanol	+	+	+	+	+	+	o	o	o
Spirit	+	+	+	+	+	o	o	o	o

+: good (no change) o: acceptable (minor change, still readable) -: poor

Chemicals:

Ad Blue: Aral, Anti-Freeze: Speedfrost "Speedfroil" 1:1 in water, Bioethanol E85: CropEnergies CropPower85

Brake Fluid: DOT 4 Synthetic (One Way), Cleaner Solvent: "Caramba" Cold Cleaner, Engine Oil: TOTAL quartz 700, 10 W 40

Gasoline: TOTAL Euro 95, Hard Wax Polish: „Nigrin“ Hard Wax Polish

Appendix

Compliance Data

UL – Underwriters Laboratories (UL 969, Category PGJI2)

File Number: MH27538, Category PGJI2

This material is UL recognized for indoor and outdoor use where exposed to high humidity or occasional exposure to water.

Application Surface	Max Temp (°C)	Min Temp (°C)
Alkyd paint	150	-40
Aluminum	150	-40
Galvanized steel	150	-40
Stainless steel	150	-40
Nylon - Polyamide	100	-40
Polycarbonate	100	-40
Acrylonitrile butadiene styrene (ABS)	80	-40

The UL certification includes the printing with the following thermal transfer ribbons:

Astor	APR5, AXR 7+
Astro-med	R-5, RV2
DNP	R300, R510, TR6075
Graficor	GC12, GC14
Italgrafica	TF330, TF335P
Kurz	K501
Pelikan	T001, T016
Ricoh	B110A, B110CX

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2024 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.