

Facestock

An aluminized and coated mechanical brushed PET film.

Basis Weight	70 g/m ²	ISO 536
Caliper	51 µm	ISO 534

Adhesive

A permanent, acrylic based adhesive.

Liner

Hygroflat 125, an one-side coated, bleached kraft paper.

Basis Weight	126 g/m ²	ISO 536
Caliper	126 µm	ISO 534

Laminate

Total Caliper	196 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	14.5 N/25mm	FTM 9 Glass
Peel Adhesion 90°	9 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-40 °C to 90 °C	

Adhesive Performance

The adhesive is perfectly suitable for uses that need a good resistance to UV, fats or solvents. Good general adhesion performance on a wide range of substrates.

Applications and Use

The brushed film is designed to meet the special needs of the graphic arts industry, mainly used for decoration in spirits, beverage, food and personal care applications.

The hygroflat backing paper is specially suited to the more critical refolding demands of high-speed computer printers, providing optimum layflatness and excellent interfolding characteristics.

Conversion and Printing

The material can be printed by flexo and offset. The top coating ensures perfect keying of the ink, especially in cases where UV - curing inks are used.


Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

AA659

Fasson ®

772 BRUSHED CHROME S697-HF125

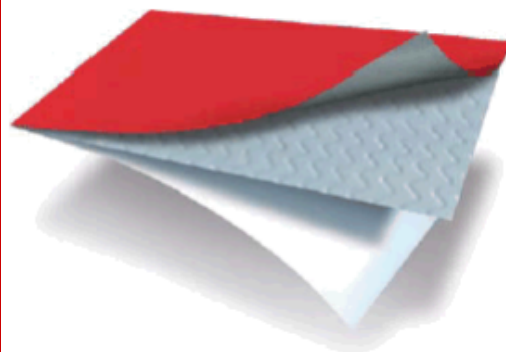

772 BRUSHED CHROME

S697

HF125

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2025 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.