

Facestock

A matt, white woodfree machine finished paper with good opacity, excellent absorption and superior toner bonding characteristics.

The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

Basis Weight	64 g/m ²	ISO 536
Caliper	75 µm	ISO 534

Adhesive

A general purpose permanent, acrylic based adhesive.

Liner

Hygroflat 55, a one side coated, bleached kraft paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	56 g/m ²	ISO 536
Caliper	59 µm	ISO 534

Second Adhesive

A general purpose permanent, acrylic based adhesive.

Second Liner

Hygroflat 55, a one side coated, bleached kraft paper.

Basis Weight	56 g/m ²	ISO 536
Caliper	59 µm	ISO 534

Laminate

Total Caliper	219 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	10 N/25mm	FTM 9 Glass
Peel Adhesion 90°	5.5 N/25mm	FTM 2 St.St.
Min. Application Temp.	0 °C	
Service Temperature	-20 °C to 80 °C	

Adhesive Performance

The adhesive features good tack and adhesion performance on a wide range of substrates, even at low temperatures. The adhesive has very low bleeding characteristics for optimal use in hot laser and copier machines.

Applications and Use

The face material is designed for the manufacture of A4 sheets for use in laserprinters, copiers, monochrome and colour inkjet printers. The surface structure provides excellent toner bonding and print resolution. This makes it ideal for label applications using variable information such as address, instruction and inventory labels, labels for office use and many other applications.


The hygroflat backing paper is specially suited to the more critical refolding demands of high-speed computer printers, providing optimum layflatness and excellent interfolding characteristics.

The hygroflat backing paper is specially suited to the more critical refolding demands of high-speed computer printers, providing optimum layflatness and excellent interfolding characteristics.

AA949

Fasson®

**PB LCJ PREMIUM FSC
2XS2012HT-2XHF55 FSC**

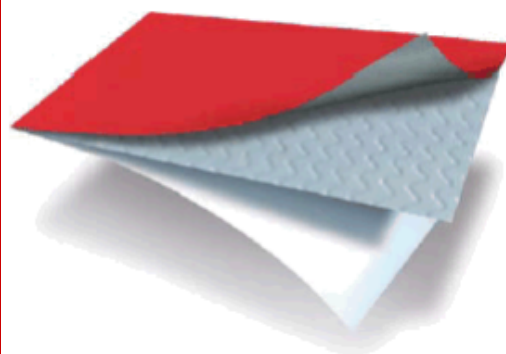

LCJ PREMIUM FSC

S2012HT

HF55

S2012HT

HF55 FSC



The mark of
responsible forestry

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Conversion and Printing

Facestock is suitable for simple line or process printing by flexo and offset. The material can be converted by the conventional roll-to-sheet conversion technologies.

The Backing paper can be printed with conventional printing methods.

The Backing paper can be printed with conventional printing methods.

The special product lay-out could have an influence on conversion speed.

Compliance and Approvals

The adhesive S2012HT is suitable for contact with dry, moist, and fatty foodstuffs that have a reduction factor of 4 or higher in this construction. For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.

The laminate is made with FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2025 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.