

Facestock

A gold tinted, one side clay coated printing paper.

Basis Weight 98 g/m² ISO 536

Adhesive

A general purpose permanent, acrylic based adhesive.

Liner

Liner rBG40 BROWN, a siliconized supercalendered glassine paper with 15% recycled (PCR) content. Being produced with recycled material, there is a possible higher incidence of impurities, visible fibers, and slight variation in tone.

Basis Weight 54 g/m² ISO 536

Caliper 47 µm ISO 534

Laminate

Total Caliper 143 µm±10% ISO 534

Performance Data

Initial Tack 16 N/25mm FTM 9 Glass

Peel Adhesion 90° 9 N/25mm FTM 2 St.St.

Min. Application Temp. 5 °C

Service Temperature -20 °C to 80 °C

Adhesive Performance

The adhesive is characterized by a high initial tack, excellent adhesion and good low temperature performance on a wide variety of substrates.

Applications and Use

High quality labels for cosmetic products, toiletries, household goods etc.

Conversion and Printing

Material can be printed by letterpress, off-set, flexo, gravure, screen and hot-foil stamping. Due to its fairly non-absorbant surface nature, fast drying inks are recommended.

Compliance and Approvals

The adhesive S2000N is suitable for contact with dry, moist, and fatty foodstuffs that have a reduction factor of 4 or higher in this construction in this construction. For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.


Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

AB523

Fasson®

LITHO GOLD S2000N-rBG40BR FSC

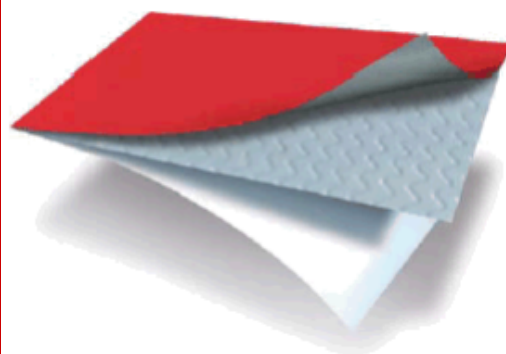

LITHO GOLD

S2000N

rBG40BR FSC

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2025 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.