AE233

Fasson ®

THERMAL PP100 TOP WHITE S692N-BG40WH FSC

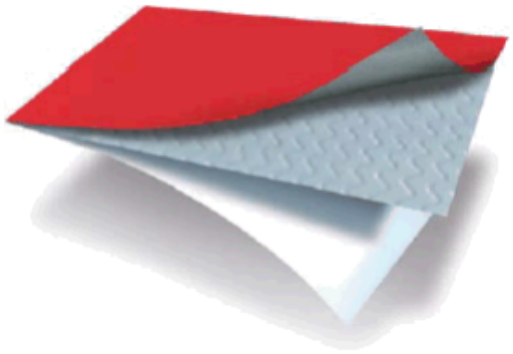

THERMAL PP100 TOP WHITE

S692N

BG40WH FSC

Facestock

A white polypropylene BPA free film with thermo-sensitive coating (black imaging) and a back barrier.

Basis Weight	78 g/m²	ISO 536
Caliper	98 µm	ISO 534

Adhesive

A general purpose permanent, acrylic based adhesive.

Liner

BG40 white, a supercalendered glassine paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	59 g/m²	ISO 536
Caliper	50 µm	ISO 534

Laminate

Total Caliper	164 µm±10%	ISO 534

Performance Data

Initial Tack	10 N/25mm	FTM 9 Glass
Peel Adhesion 90°	6 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-20 °C to 80 °C	

Adhesive Performance

S692N is a clear permanent adhesive featuring excellent UV resistance and weatherability together with good adhesion performance, even on apolar substrates.

S692N in combination with polyolefin face materials (PE85, PP, Global MDO) is approved by Recyclass as fully compatible with the rigid HDPE recycling stream.

Applications and Use

A durable synthetic material with enhanced tear resistance and high sensitivity for use in a wide range of applications, including commercial tagging, wristbands, sport/game licensing, amusement pass, and ski lift tickets where short life or low contamination is common. The back barrier offers improved handling and stability. Prolonged storage outside storage conditions defined by FINAT (20-25°C; 40-50%RH) might increase the risk of swelling and curling.

Conversion and Printing

This thermo-sensitive product is designed for use in thermal printing systems at printing speeds up to 200 mm/sec. The product can be converted by all conventional roll conversion technologies including flexographic and UV letter press. Inks containing alcohol or volatile organic solvents may cause discolouration of the thermosensitive coating. It is advisable to test inks and varnishes before conversion.

Compliance and Approvals

The adhesive S692N is suitable for contact with dry, moist and fatty foodstuffs with a reduction factor of 3 or higher in this construction.

For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.

FSC
www.fsc.org
FSC® C004451
The mark of responsible forestry

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.
If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see http://terms.europe.averydennison.com

©2026 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.