

### Facestock

A white, surface-sized, supercalendered woodfree printing paper. The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

Basis Weight	68 g/m <sup>2</sup>	ISO 536
Caliper	66 µm	ISO 534

### Adhesive

A general purpose permanent, acrylic based adhesive.

### Liner

PP50, a clear polypropylene liner giving smoothness to the adhesive layer.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	45 g/m <sup>2</sup>	ISO 536
Caliper	50 µm	ISO 534

### Second Adhesive

A general purpose permanent, acrylic based adhesive.

### Second Liner

BG45 white FSC is a supercalendered glassine paper.

Basis Weight	70 g/m <sup>2</sup>	ISO 536
Caliper	61 µm	ISO 534

### Laminate

Total Caliper	204 µm±10%	ISO 534
---------------	------------	---------

### Performance Data

Initial Tack	10 N/25mm	FTM 9 Glass
Peel Adhesion 90°	6 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-20 °C to 80 °C	

### Adhesive Performance

S692N is a clear permanent adhesive featuring excellent UV resistance and weatherability together with good adhesion performance, even on apolar substrates.

S692N in combination with polyolefin face materials (PE85, PP, Global MDO) is approved by Recyclclass as fully compatible with the rigid HDPE recycling stream.

### Applications and Use


This white economical multipurpose paper provides good print resolution of picket fence barcodes and numeric data with thermal transfer print speed up to 150mm/sec. Main applications are print & apply, warehouse inventory labeling and other in-house product identification labels.

The film liner allows application on high speed lines.

## AF088

### Fasson®

**PB VELLUM EXTRA FSC**  
**2XS692N-PP50/BG45WH FSC**

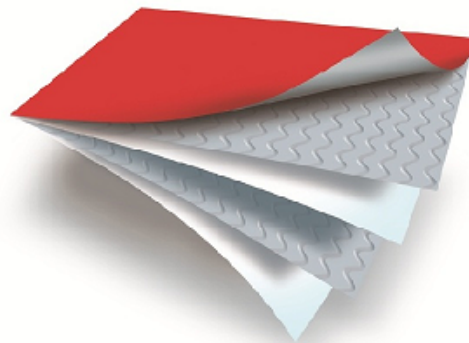

VELLUM EXTRA FSC

S692N

PP50

S692N

BG45WH FSC



The mark of  
responsible forestry

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

### Conversion and Printing

This Thermal Transfer face material is developed and selected in close co-operation with leading Thermal Transfer printer and ribbon manufacturers. The print quality of the Thermal Transfer system depends on the correct match of Thermal Transfer ribbon, printer and printing surface, therefore it is strongly recommended to test in application before use. The smooth surface of this paper is specially suited for single and multicolour line or process printing in all the usual printing technologies. Offers superior print characteristics where a gloss surface finish is not required.

The siliconized PP layer film permits very high speed conversion and dispensing. Temperatures up to 80°C can be used for ink drying, provided the web temperature is below 50°C when it reaches the waste stripping station.

The special product lay-out could have an influence on conversion speed.

### Compliance and Approvals

The adhesive S692N is suitable for contact with dry, moist and fatty foodstuffs with a reduction factor of 3 or higher in this construction.

For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.

The laminate is made with FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

### Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

### Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000

#### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see

<http://terms.europe.averydennison.com>



©2026 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.