

Facestock

A specially-coated, extra white, woodfree printing paper with an even smoother micro-absorbent surface structure.

The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

Basis Weight	85 g/m ²	ISO 536
Caliper	77 µm	ISO 534

Adhesive

A general purpose permanent, acrylic based adhesive.

Liner

BG40 brown, supercalendered glassine paper.

Basis Weight	53 g/m ²	ISO 536
Caliper	46 µm	ISO 534

Laminate

Total Caliper	137 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	15 N/25mm	FTM 9 Glass
Peel Adhesion 90°	8 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-20 °C to 80 °C	

Adhesive Performance

The adhesive is characterized by a high initial tack, excellent adhesion and good low temperature performance on a wide variety of substrates.

Applications and Use

Transfer Plus is a specially coated extra white paper providing :
 - Compatibility with a wide range of wax and wax-resin, thermal transfer ribbons.- Excellent print resolution of picket fence and rotated barcodes.- Thermal transfer print speeds up to 225 mm/sec.Application include: inventory, address, product identification and pharma labeling.Our Transfer face materials are developed and selected in close co-operation with leading Thermal Transfer ribbon manufacturers. The print quality of the Thermal Transfer system depends on the correct match of Thermal Transfer ribbon, printer and printing surface, therefore it is strongly recommended that careful selection should be made to optimise print results.Refer to ribbon/receiver compatibility guide for further information.

Conversion and Printing

The material can be converted and printed by all conventional printing technologies. Areas of the label designated for imprinting should not be printed or varnished prior to imprinting.


Compliance and Approvals

The adhesive S2000N is suitable for contact with dry, moist, and fatty foodstuffs that have a reduction factor of 4 or higher in this construction. For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.

AF245

Fasson ®

TRANSFER PLUS FSC S2000N-BG40BR

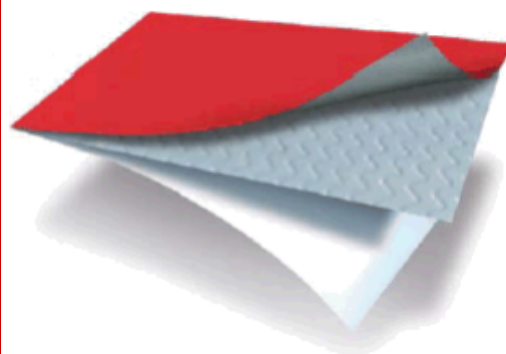

TRANSFER PLUS FSC

S2000N

BG40BR



This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2024 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.