

Facestock

A clear, monomeric plasticised PVC film.

Basis Weight	103 g/m ²	ISO 536
Caliper	80 µm	ISO 534

Adhesive

A special purpose permanent, acrylic based adhesive.

Liner

BG45 white, a supercalendered glassine paper.

Basis Weight	71 g/m ²	ISO 536
Caliper	61 µm	ISO 534
Transparency	50 %	DIN 53147

Laminate

Total Caliper	165 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	14 N/25mm	FTM 9 Glass
Peel Adhesion 90°	9 N/25mm	FTM 2 St.St.
Min. Application Temp.	10 °C	
Service Temperature	-20 °C to 80 °C	

Applications and Use

Promotional labels and stickers for indoor use offering good durability. Further applications include labels on plastic bottles for household chemicals and motor oil.

Conversion and Printing

The corona treated face material can be printed by conventional printing techniques including flexo, screen, offset, letterpress, silkscreen, gravure, and hot or cold foiling processes. UV, water-based and solvent-based inks can be used. On-press corona treatment is recommended for optimal ink adhesion. We strongly recommend to use a primer in the printing process of PVC in general. The face material is suitable for Thermal Transfer printing. Exact inks, foils and ribbons should be specified by your ink/foil/ribbon supplier.


Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

AF251

Fasson ®

PVC CLEAR S695-BG45WH IMP

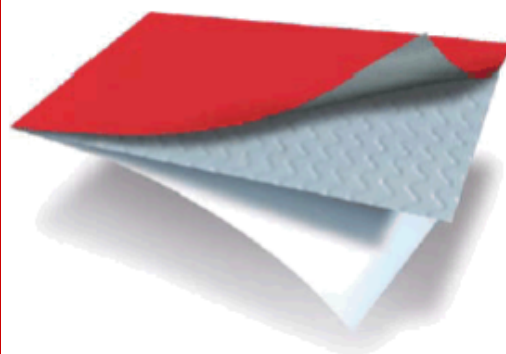

PVC CLEAR

S695

BG45WH

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.
If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com*

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2023 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.