

Facestock

A semi transparent paper.

The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

Basis Weight	60 g/m²	ISO 536
Caliper	55 µm	ISO 534

Adhesive

A general purpose permanent, acrylic based adhesive.

Liner

Hygroflat 100 FSC, a one side coated, bleached kraft paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	100 g/m²	ISO 536
Caliper	108 µm	ISO 534

Laminate

Total Caliper	176 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	10 N/25mm	FTM 9 Glass
Peel Adhesion 90°	5.5 N/25mm	FTM 2 St.St.
Min. Application Temp.	0 °C	
Service Temperature	-20 °C to 80 °C	

Adhesive Performance

The adhesive features good tack and adhesion performance on a wide range of substrates, even at low temperatures. The adhesive has very low bleeding characteristics for optimal use in hot laser and copier machines.

Applications and Use

Product suitable for the use of transparent matt laser labels, e.g. no label look address labels.

The hygroflat backing paper is specially suited to the more critical refolding demands of high-speed computer printers, providing optimum layflatness and excellent interfolding characteristics.

Conversion and Printing

The material can be converted by conventional roll-to-roll conversion technologies. For roll-to-sheet, we recommend our materials with HF-liner.

Compliance and Approvals

The adhesive S2012HT is suitable for contact with dry, moist, and fatty foodstuffs that have a reduction factor of 4 or higher in this construction. For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.

The laminate is made with FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)


Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

AG087

Fasson®

LASERCOPY SEMI CLEAR FSC S2012HT-HF100 FSC

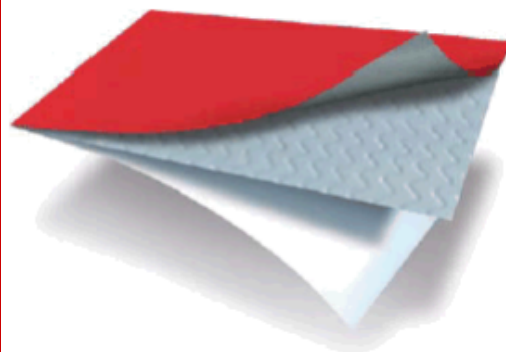

LASERCOPY SEMI CLEAR
FSC

S2012HT

HF100 FSC



The mark of
responsible forestry

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2025 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.