

Facestock

A white woodfree, top coated thermal paper, with a black imaging thermosensitive coating providing good resistance to moisture, fat, oil, alcohol. This product is produced without the use of phenols.

The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

Basis Weight	75 g/m ²	ISO 536
Caliper	74 µm	ISO 534
Image Density (Min)	1.3 odu	
Max Print Speed	250 mm/sec	

Adhesive

A special purpose rubber hotmelt adhesive, featuring high tack and final peel adhesion with very high coat weight.

Liner

BG40WH FSC, a supercalandered siliconized white glassine paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	57 g/m ²	ISO 536
Caliper	51 µm	ISO 534

Laminate

Total Caliper	158 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	45 N/25mm	FTM 9 Glass
Peel Adhesion 90°	25 N/25mm	FTM 2 St.St.
Min. Application Temp.	0 °C	
Service Temperature	-20 °C to 70 °C	

Adhesive Performance

TS8005 uses an aggressive formulation developed for labelling rubber with irregular and curved surfaces. It withstands typical chemicals used by tyre manufacturers, such as mould release agents or components migrating from the rubber. This adhesive is developed specifically for direct thermal printed labels.

Applications and Use


This Direct Thermal product is designed for use in general purpose product labeling, where a short term resistance to moisture, assortment of chemicals, plasticizers and handling is required. Typical end use application include delicatessen, back of store, item level labeling and moist goods weigh scale. Long term contact with an assortment of chemicals or long term wet immersion can cause potential image fading.

The main application for this material is tyre labelling for the production of track and trace labels that are required to adhere to tyres in a reliable way. This label material does not have any negative effect on the properties and performance of labelled tyres. In addition it is also used in other applications in which a highly aggressive adhesive is needed to label rough surfaces. The product is designed for short term labelling of tyres (maximum 3 weeks).

AI837

Fasson ®

THERMAL TOP S8 NP FSC TS8005-BG40WH FSC

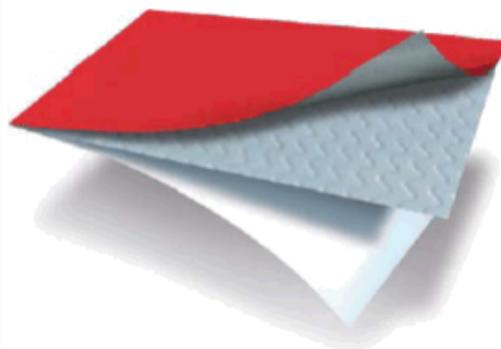

THERMAL TOP S8 NP FSC

TS8005

BG40WH FSC



The mark of
responsible forestry

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Conversion and Printing

The product can be converted by all conventional roll conversion technologies including flexographic and UV letter press. However, due to the thermographic properties, exposure above 50°C may cause premature imaging or discoloration. It is advisable to test inks and varnishes before conversion. We generally recommend not to pre-print the label area that needs to be thermally printed.

Note: this product contains a very aggressive adhesive. If the product is without SGP (Special Gum Pattern), adhesive ooze on the sides of the slit rolls can occur. To minimize this risk it is highly recommended to order this material with an adhesive-free zone on each side of the slit rolls (with SGP / gumpattern). Please contact your sales representative for further details.

Compliance and Approvals

Adhesive TS8005 has attained the two star certification for biobased content according to EN 16640, meaning that TS8005 contains certified Biobased Carbon Content of at least 40%. (TÜV AUSTRIA licensee number: S0259)



*The OK biobased certification is only applicable to the adhesive TS8005.

The laminate is made with FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

Shelf Life

To obtain optimal performance, use this product within one year of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2026 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.