AL284

Fasson ®

PEHD TE
S692N-PET36

Facestock

A matt white, ultra-destructible PEHD film with print-receptive surface.

Basis Weight	60 g/m²	ISO 536
Caliper	109 µm	ISO 534

Adhesive

A general purpose permanent, acrylic based adhesive.

Liner

A clear polyester liner. The polyester liner giving optimum smoothness to the adhesive layer.

Basis Weight	50 g/m²	ISO 536
Caliper	36 µm	ISO 534
Transparency	99 %	DIN 53147

Laminate

Total Caliper	168 µm±10%	ISO 534

Performance Data

Initial Tack	15 N/25mm	FTM 9 Glass
Peel Adhesion 90°	9 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-20 °C to 80 °C	

Adhesive Performance

S692N is a clear permanent adhesive featuring excellent UV resistance and weatherability together with good adhesion performance, even on apolar substrates.

Applications and Use

This film is ultra-destructible by de-lamination. Combined with the high adhesive performance, this fragility will give a rapid ‘tamper evident’ bond on most substrates which creates an ideal security feature. Because these characteristics can limit label relocation, an application pre-test is advisable to determine suitability.

The robust film liner allows for consistant, snap free, application on high speed lines. As liner is transparent, the applicator must detect the print itself or registration marks must be provided on either face or liner.


Conversion and Printing

The product can be printed by all conventional printing technologies including water-based flexo, letterpress and UV-screen and thermal transfer. It is recommended that corners are designed with as large a radius is practical to facilitate matrix striping.Rolls must be handled with care during slitting, transport and storage to avoid edge damage.

Press stability is good with stable, consistant register during conversion. Flat bed performance is good while solid and magnetic rotary dies need additional care. (Die bearers must be adjusted to the polyester liner).

Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

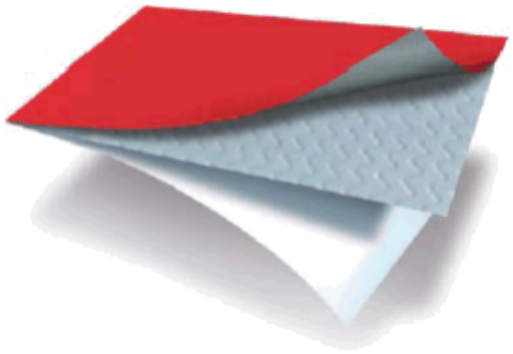

PE HD TAMPEREVIDENT	
S692N	
PET36	

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.
If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe
Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty
All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see http://terms.europe.averydennison.com

©2026 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.