

### Facestock

A white woodfree, top and back coated thermal paper, with a high sensitive black imaging thermosensitive coating providing excellent resistance to moisture, fat, oil, alcohol, etc.

The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

Basis Weight	76 g/m <sup>2</sup>	ISO 536
Caliper	82 µm	ISO 534
Image Density (Min)	1.20 odu	
Max Print Speed	300 mm/sec	

### Adhesive

A general purpose permanent, rubber based adhesive.

### Liner

BG40 BROWN FSC certified, supercalendered glassine paper.

Basis Weight	53 g/m <sup>2</sup>	ISO 536
Caliper	46 µm	ISO 534

### Laminate

Total Caliper	142 µm±10%	ISO 534
---------------	------------	---------

### Performance Data

Initial Tack	18 N/25mm	FTM 9 Glass
Peel Adhesion 90°	9 N/25mm	FTM 2 St.St.
Min. Application Temp.	0 °C	
Service Temperature	-40 °C to 60 °C	

### Adhesive Performance

The adhesive features excellent tack and adhesion on a wide variety of substrates, including apolar, slightly rough and curved substrates. Particularly good performance at lower temperatures, e.g. labeling of chilled products.

### Applications and Use

This Direct Thermal solution is designed for use in logistic labelling as well as retail applications where some resistance to oil, moisture heat and short term exposure to humidity is required. Typical end use applications include front of store labeling and wall-to-wall process tracking. Longer term contact with moisture, oil, fats, plasticisers and exposure to strong lighting can cause potential image fading. This product is produced without the use of Bisphenol (BP). The product complies with the Swiss ordinance (SR814.81) on the restriction of BPS\*. \* both Eu and Swiss authorities regulate on a 0.02% trace amount allowance, this is generally considered as free-off BPA or BPS. This direct thermal material is designed for indirect food contact applications, for more information on the exact applications please contact your sales representative.


### Conversion and Printing

The product can be converted by all conventional roll conversion technologies including flexographic and UV letter press. However, due to the thermographic properties, exposure above 50°C may cause premature imaging or discoloration. It is advisable to test inks and varnishes before conversion. We generally recommend not to pre-print the label area that needs to be thermally printed.

## AL312

### Fasson ®

#### THERMAL 300GP FSC S2045N-BG40BR

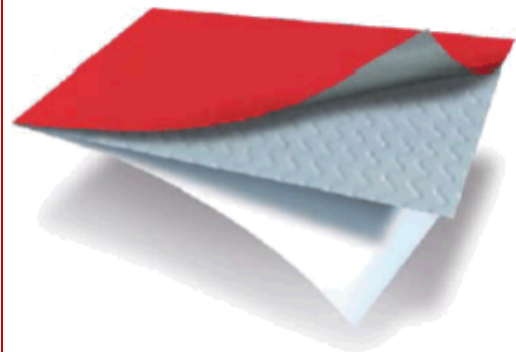

THERMAL 300GP FSC

S2045N

BG40BR FSC



The mark of  
responsible forestry

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

### Compliance and Approvals

The adhesive S2045N is suitable for contact with dry and moist, non-fatty foodstuffs in this construction. For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.

Adhesive S2045N has attained the two star certification for biobased content according to EN 16640, meaning that S2045N contains certified Biobased Carbon Content of at least 40%. (TÜV AUSTRIA licensee number: S0259)



\*The OK biobased certification is only applicable to the adhesive S2045N.

### Shelf Life

To obtain optimal performance, use this product within one year of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

### Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000



#### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2025 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.