

Facestock

A white, one side machine coated, woodfree printing paper with semi-gloss appearance.

The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

Basis Weight	78 g/m ²	ISO 536
Caliper	67 µm	ISO 534

Adhesive

S9500 is an acrylic based permanent OK compost INDUSTRIAL certified adhesive.

Liner

BG40WH FSC, a supercalandered siliconized white glassine paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	57 g/m ²	ISO 536
Caliper	51 µm	ISO 534

Laminate

Total Caliper	132 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	12.5 N/25mm	FTM 9 Glass
Peel Adhesion 90°	7 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-20 °C to 80 °C	

Adhesive Performance

The adhesive is characterized by a good initial tack and good adhesion on a wide variety of substrates.

Applications and Use

The products are suitable for a wide range of promotional and industrial label applications where attractive semi-gloss appearance in multi-colour work is required.

S9500 is ideal be used for all kinds of applications, but is specifically suited for those kinds of applications where the complete packaging should be biodegradable and where indirect or direct food contact with dry foodstuff is required (ie. fruits & vegetables labeling).

Conversion and Printing

Facestock is suitable for solid and halftone images and text printing by letterpress, flexo (UV and waterbased) offset and screen processes. Hot and cold foil stamping, varnishing and variable imprinting with thermal transfer are also suitable for this product.

Compliance and Approvals


The adhesive S9500 is suitable for contact with dry, non-fatty foodstuffs in this construction. For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.

S9500 complies with the EN 13432 standard for composting and is OK compost INDUSTRIAL certified under the tracking number S0259.

AM234

Fasson ®

MC PRIMECOAT FSC
S9500-BG40WH FSC

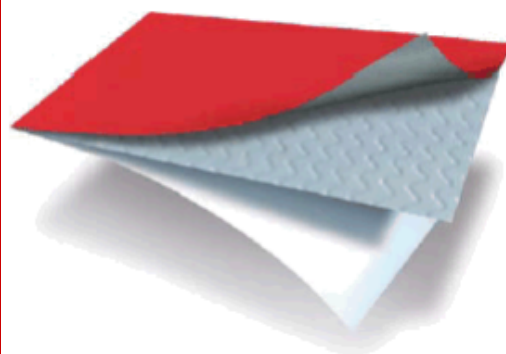

MC PRIMECOAT FSC

S9500

BG40WH FSC



The mark of
responsible forestry

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

The laminate is made with FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see

<http://terms.europe.averydennison.com>

©2025 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.