

Facestock

A natural unbleached, uncoated, laid watermarked, printing paper.

Basis Weight	90 g/m ²	ISO 536
Caliper	130 µm	ISO 534

Adhesive

S9500 is an acrylic based permanent OK compost INDUSTRIAL certified adhesive.

Liner

BG45 white, a supercalendered glassine paper.

Basis Weight	71 g/m ²	ISO 536
Caliper	61 µm	ISO 534
Transparency	50 %	DIN 53147

Laminate

Total Caliper	206 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	12.5 N/25mm	FTM 9 Glass
Peel Adhesion 90°	7 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-20 °C to 80 °C	

Adhesive Performance

The adhesive is characterized by a good initial tack and good adhesion on a wide variety of substrates.

Applications and Use

This product is suitable for labelling of high and premium goods eg: spirits, specialist foods. It has a 'natural' image.

S9500 is ideal be used for all kinds of applications, but is specifically suited for those kinds of applications where the complete packaging should be biodegradable and where indirect or direct food contact with dry foodstuff is required (ie. fruits & vegetables labeling).

Conversion and Printing

Printable by all conventional printing techniques. Due to open and textured nature of the facematerial, best results are in general from those techniques that give maximum conformability of printing plate such as flexo and offset. Also excellent results using screen printing.

Compliance and Approvals

The adhesive S9500 is suitable for contact with dry, non-fatty foodstuffs in this construction. For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.

S9500 complies with the EN 13432 standard for composting and is OK compost INDUSTRIAL certified under the tracking number S0259.


Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

AM235

Fasson ®

NATURAL BOIS S9500-BG45WH

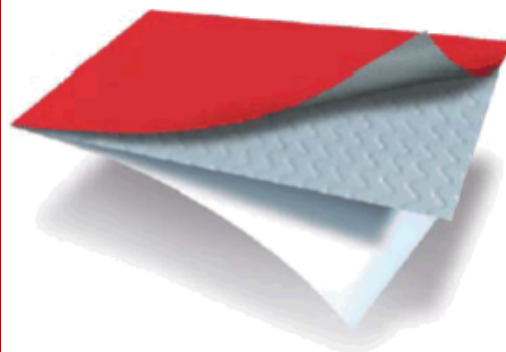

NATURAL BOIS

S9500

BG45WH

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2025 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.