

Facestock

A 'frangible' matt white cast PVC film.

Basis Weight	77 g/m ²	ISO 536
Caliper	60 µm	ISO 534

Adhesive

A general purpose permanent, acrylic based adhesive.

Liner

BG50 white, a supercalendered glassine paper.

Basis Weight	80 g/m ²	ISO 536
Caliper	68 µm	ISO 534

Laminate

Total Caliper	154 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	16 N/25mm	FTM 9 Glass
Peel Adhesion 90°	9 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-20 °C to 80 °C	

Adhesive Performance

The adhesive is characterized by a high initial tack, excellent adhesion and good low temperature performance on a wide variety of substrates.

Applications and Use

The product is designed with extreme tamper evidence as a priority. The heavily filled face is highly frangible, of low caliper – giving little 'edge' to pick at - and conformable/semi squeezable to avoid accidental breakage after application. At the same time the face has been specially formulated with just enough tensile/tear strength to allow simple label shapes to be die cut and matrix stripped for subsequent automatic application where required. Typical applications include identification labels for instrument panels, warning signs and nameplates on electrical appliances as well as tamper evident security seals.

Conversion and Printing

The product can be printed via all conventional roll label technologies, including water based flexo, UV letterpress, thermal transfer and screen. It is essential that labels are cut cleanly to avoid tear propagation hence dies must be sharp and in good condition. Film grade flat bed, solid and magnetic rotary dies can all be used while all rotary tools should be proofed to the liner. It is recommended that corners are designed with as large a radius as is practical to facilitate matrix stripping. Rolls must be handled with care during slitting, transport and storage to avoid edge damage.


Compliance and Approvals

The adhesive S2000N is suitable for contact with dry, moist, and fatty foodstuffs that have a reduction factor of 4 or higher in this construction in this construction. For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.

AN778

Fasson ®

PVC MATT WHITE UD S2000N-BG50WH

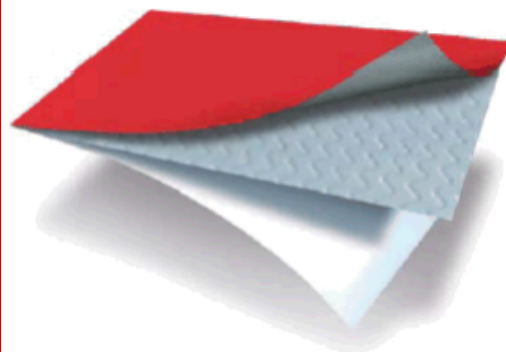

PVC MATT WHITE UD

S2000N

BG50WH

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.
If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com*

Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2024 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.