

Facestock

A white machine coated, supercalendered woodfree printing paper with semi gloss finish.

The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

Basis Weight	62 g/m²	ISO 536
Caliper	59 µm	ISO 534
Fluorescence	>9	Laetus Scale

Adhesive

A permanent, acrylic based adhesive.

Liner

BG40 BROWN FSC certified, supercalendered glassine paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	54 g/m²	ISO 536
Caliper	47 µm	ISO 534

Laminate

Total Caliper	124 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	19 N/25mm	FTM 9 Glass
Peel Adhesion 90°	11 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-40 °C to 90 °C	

Adhesive Performance

The adhesive is perfectly suitable for uses that need a good resistance to UV, fats or solvents. Good general adhesion performance on a wide range of substrates.

Applications and Use

The flexible facestock allows application on small cylindrical containers, test tubes, curved substrates and on other known substrates in the pharmaceutical industry. The luminescent properties of the product allow automatic label dispensing and/or missing label control using UV-light detection equipment.

Conversion and Printing

Excellent conversion characteristics in rotary and flat-bed. The double coated flexible paper allows fine-quality printing in letterpress, offset, flexo, screen, hot foil stamping and permits high quality printing of small typeface and difficult characters with optimum results

Compliance and Approvals

The laminate is made with FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)


Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

AO329

Fasson®

LW FSC
S697-BG40BR FSC

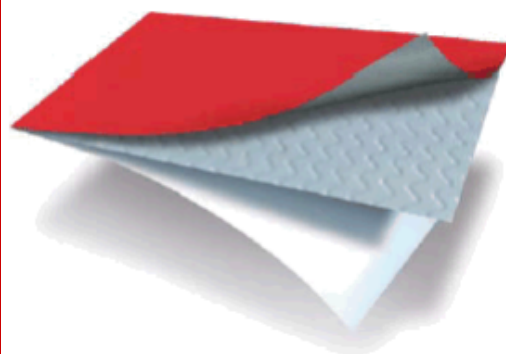

LW FSC

S697

BG40BR FSC



The mark of
responsible forestry

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2025 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.