

### Facestock

White, machine coated, semi-gloss appearance with 30% recycled content.

The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

Basis Weight	78 g/m <sup>2</sup>	ISO 536
Caliper	64 µm	ISO 534

### Adhesive

A general purpose permanent, acrylic based adhesive.

### Liner

A white glassine liner reinforced with PET.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	103 g/m <sup>2</sup>	ISO 536
Caliper	82 µm	ISO 534

### Laminate

Total Caliper	164 µm±10%	ISO 534
---------------	------------	---------

### Performance Data

Initial Tack	12 N/25mm	FTM 9 Glass
Peel Adhesion 90°	8 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-20 °C to 80 °C	

### Adhesive Performance

S692N is a clear permanent adhesive featuring excellent UV resistance and weatherability together with good adhesion performance, even on apolar substrates.

### Applications and Use

30% post consumer waste recycled material suitable as a general labelling material with very good sustainability credentials.

The reinforced liner provides excellent dispensing properties in the most demanding circumstances.

### Conversion and Printing

Suitable for solid and halftone images and text printing by letterpress, flexo (UV and waterbased) offset and screen processes. Hot and cold foil stamping, varnishing and variable imprinting with thermal transfer are also suitable for this product. Being produced from 30% post consumer waste paper, there is a possible higher incidence of impurities in the product compared to virgin fiber products.

### Compliance and Approvals


The adhesive S692N is suitable for contact with dry, moist and fatty foodstuffs with a reduction factor of 3 or higher in this construction. For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.

The laminate is made with FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

# AW204

## Fasson ®

**rMC PRIMECOAT FSC  
S692N INC-40WH FSC/PET23**

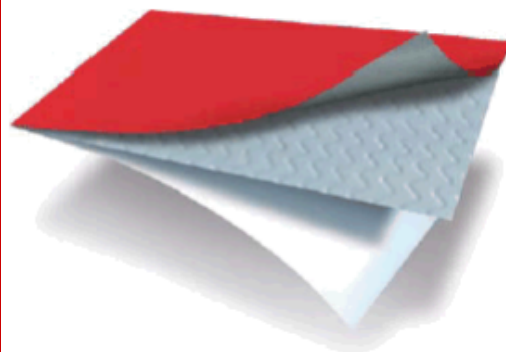

RMC PRIMECOAT FSC

S692N

BG40WH FSC/PET23



*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

### Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

### Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000



### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2025 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.