

Facestock

A white, uncoated woodfree printing paper with a tactile hand made appearance and feel, wet strength and fungicidal treatments and a specific topcoating for excellent transfer and anchorage of ElectroInk as used in the Indigo process. The rPLUS underlaminate contains 70% post consumer recycled content (PCR), ensuring optimum performances in the ice bucket, and in wet conditions in general, by minimizing the risk of wrinkling of the material.

The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

Basis Weight	216 g/m ²	ISO 536
Caliper	232 µm	ISO 534

Laminate

Total Caliper	236 µm±10%	ISO 534
---------------	------------	---------

Applications and Use

This product is designed for Wine labelling, it is suitable for primary labelling of high and premium goods eg: spirits, specialist foods.

Conversion and Printing

This product is qualified for HP Indigo digital printing. It includes a topcoat designed for printing with HP Indigo presses, ensuring excellent ink anchorage and image quality, without the need of in-line priming. Print quality in conventional processes and combination with laquers to be evaluated. Excellent conversion characteristics in rotary and flat-bed. It is recommended to overvarnish or overlamine the product to protect the print.

Compliance and Approvals

The laminate is made with FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)


Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

AZ519

Fasson ®

DIG IND RUS BL rPLUS FSC S2047N-BG45WH FSC

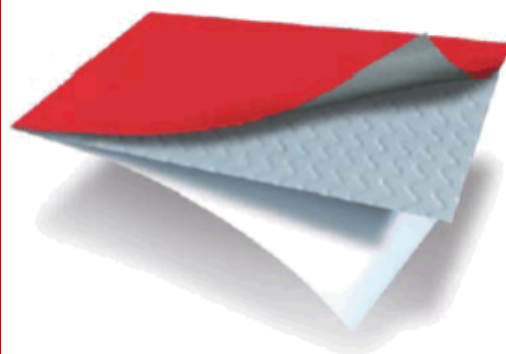

DIG IND RUS BL RPLUS FSC



The mark of
responsible forestry

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2024 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.