

#### Facestock

Transparent cellulose acetate gloss clear film. The acetate film complies to the EN 13432 standard for composting and is OK Compost Home certified (the self-adhesive laminate does not have certification for composting).

Basis Weight	66 g/m <sup>2</sup>	ISO 536
Caliper	50 µm	ISO 534

#### Adhesive

An extra permanent, acrylic based adhesive.

#### Liner

BG45 white FSC is a supercalendered glassine paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	72 g/m <sup>2</sup>	ISO 536
Caliper	63 µm	ISO 534

#### Laminate

Total Caliper	134 µm±10%	ISO 534
---------------	------------	---------

#### Performance Data

Initial Tack	19 N/25mm	FTM 9 Glass
Peel Adhesion 90°	11 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-40 °C to 90 °C	

#### Adhesive Performance

S700 is a reinforced permanent acrylic based adhesive with very good initial tack and adhesion to a wide range of substrates.

#### Applications and Use

Transparent labels (gloss appearance) for cosmetic and pharmaceutical applications. The face material intrinsic fragility brings a certain inviolability of the label linked with a permanent adhesive defined for the substrate. Because of its nature with cellulose, the product has little moisture resistance.

#### Conversion and Printing

Can be printed by flexo, gravure, screen and hot foil stamping. Due to its non-absorbent surface, fast drying inks should be used with letterpress and offset. Excellent conversion characteristics on flatbed and rotary presses.


#### Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

## BA999

### Fasson ®

#### ACETATE CLEAR S700-BG45WH FSC

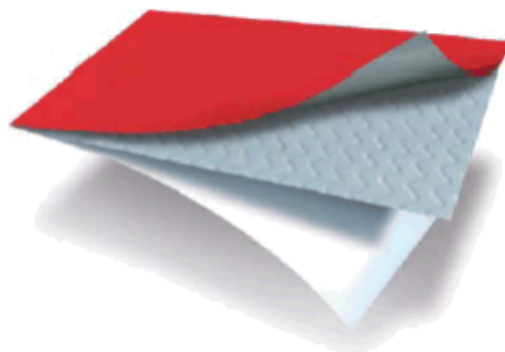

ACETATE CLEAR

S700

BG45WH FSC



The mark of  
responsible forestry

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

### Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000



#### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2025 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.