

Facestock

A white, woodfree direct thermal uncoated paper with a high sensitivity thermal coating providing good image resolution. The facestock is produced without use of Bisphenol A (BPA free). This direct thermal paper material is produced in compliance with Regulation (EC) No 1907/2006, Regulation (EU) 2025/40, and (EU) 2024/3190.

The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

Basis Weight	68 g/m ²	ISO 536
Caliper	77 µm	ISO 534
Image Density (Min)	1.20 odu	

Adhesive

A general purpose permanent, rubber based adhesive.

Liner

BG40 brown, supercalendered glassine paper.

Basis Weight	53 g/m ²	ISO 536
Caliper	46 µm	ISO 534

Laminate

Total Caliper	134 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	18 N/25mm	FTM 9 Glass
Peel Adhesion 90°	9 N/25mm	FTM 2 St.St.
Min. Application Temp.	0 °C	
Service Temperature	-40 °C to 70 °C	

Adhesive Performance

The adhesive features excellent tack and adhesion on a wide variety of substrates, including apolar, slightly rough and curved substrates. Particularly good performance at lower temperatures, e.g. labeling of chilled products.

Applications and Use

This Direct Thermal solution is designed for use in logistic or warehousing, inventory labeling applications, where limited image durability is required, on cardboard or paper surfaces. Contact with moisture, oil, fats, plasticizers and exposure to strong lighting should be avoided due to potential image fade.


Conversion and Printing

This product is designed to be converted and dispensed at high speed by all conventional roll conversion technologies, including flexographic and UV letterpress. Due to the thermographic properties, exposure above 50°C may cause premature imaging or discolouration. Inks containing alcohol or volatile organic solvents may also cause discoloration. It is advisable to test inks and varnishes before conversion. We generally recommend not to pre-print the area which will be thermally imaged.

BM312

Fasson®

THERMAL ECO BPA FREE FSC S2045N-BG40BR

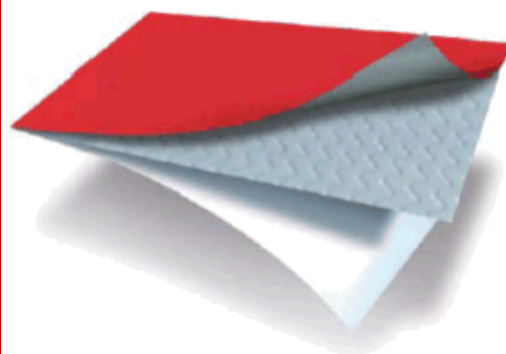

THERMAL ECO BPA FREE FSC	
-----------------------------	--

S2045N	
--------	---

BG40BR	
--------	---



The mark of
responsible forestry

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Compliance and Approvals

This direct thermal material is designed for direct contact with foodstuffs which are peeled, shelled or washed before consumption. It is the responsibility of the downstream user to ensure that the final food contact material is safe to use in the intended condition and in contact with foodstuffs. For more information on the exact applications please contact your sales representative.

Adhesive S2045N has attained the two star certification for biobased content according to EN 16640, meaning that S2045N contains certified Biobased Carbon Content of at least 40%. (TÜV AUSTRIA license number: S0259)



*The OK biobased certification is only applicable to the adhesive S2045N.

The adhesive S2045N is suitable for contact with dry and moist, non-fatty foodstuffs in this construction. For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.

REACH Compliance

Notification according to Article 33 of the REACH Regulation (SVHC) This article contains the following substance which is included on the candidate list, according to article 59 (1,10) of the REACH registration, in a concentration above 0.1% (w/w):

4,4'-sulphonyldiphenol (CAS No. 80-09-1)

Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2026 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.