

Liner

BG40 BROWN, a siliconised supercalendered glassine paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	53 g/m ²	ISO 536
Caliper	46 µm	ISO 534

Adhesive

A special purpose extra permanent, rubber based adhesive.

Second Liner

BG40 white, a supercalendered glassine paper.

Basis Weight	57 g/m ²	ISO 536
Caliper	51 µm	ISO 534

Laminate

Total Caliper	114 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	19 N/25mm	FTM 9 Glass
Peel Adhesion 90°	11 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-20 °C to 80 °C	

Adhesive Performance

S277 is an highly aggressive permanent adhesive with excellent tack and adhesion to a wide variety of substrates including rough and apolar substrates. NB. Due to the nature of the adhesive, a slight yellowing effect of the adhesive may occur over time.

Applications and Use

Special care should be given during dispensing around the gum free area.

Conversion and Printing

The upper liner is designed with a low release and the back liner with a high release.

Caution: in order to ensure appropriate conversion of our Transfer Tape products, we strongly advise to remove the low release liner from the high release one and not the opposite.

The special product lay-out could have an influence on conversion speed.

REACH Compliance

Notification according to Article 33 of the REACH Regulation (SVHC) This article contains the following substance which is included on the candidate list, according to article 59 (1,10) of the REACH registration, in a concentration above 0.1% (w/w):

6,6'-di-tert-butyl-2,2'-methylenedi-p-cr (119-47-1)


Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

BN969

Fasson ®

**TT BG40 BROWN FSC
S277 DEC SGP-BG40WH FSC**

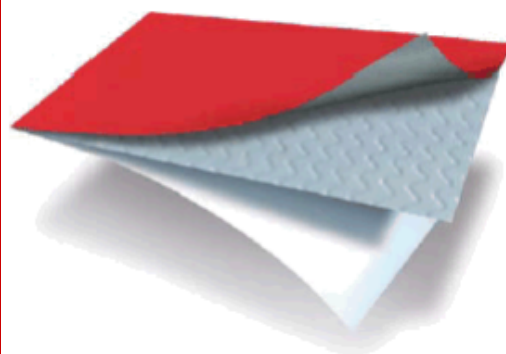

BG40 BROWN FSC

S277

BG40WH FSC



The mark of
responsible forestry

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2024 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.