

Facestock

A gloss white, specially print-treated polyester film.

| | | |
|--------------|---------------------|---------|
| Basis Weight | 71 g/m ² | ISO 536 |
| Caliper | 50 µm | ISO 534 |

Adhesive

A general purpose permanent, acrylic based adhesive.

Liner

BG45 white FSC is a supercalendered glassine paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

| | | |
|--------------|---------------------|---------|
| Basis Weight | 70 g/m ² | ISO 536 |
| Caliper | 61 µm | ISO 534 |

Laminate

| | | |
|---------------|------------|---------|
| Total Caliper | 129 µm±10% | ISO 534 |
|---------------|------------|---------|

Performance Data

| | | |
|------------------------|-----------------|--------------|
| Initial Tack | 10 N/25mm | FTM 9 Glass |
| Peel Adhesion 90° | 6 N/25mm | FTM 2 St.St. |
| Min. Application Temp. | 5 °C | |
| Service Temperature | -20 °C to 80 °C | |

Adhesive Performance

S692N is a clear permanent adhesive featuring excellent UV resistance and weatherability together with good adhesion performance, even on apolar substrates.

S692N in combination with polyolefin face materials (PE85, PP, Global MDO) is approved by Recyclclass as fully compatible with the rigid HDPE recycling stream.

Applications and Use

PET white PT is specifically developed for durable applications.

Conversion and Printing

PET WHITE PT be printed by all the conventional print technologies. The glossy, smooth surface is print treated and can be thermal transfer printed. The best results can be obtained with resin ribbons. For special requirements we strongly recommend application tests.

Compliance and Approvals

The adhesive S692N is suitable for contact with dry, moist and fatty foodstuffs with a reduction factor of 3 or higher in this construction.

For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.


Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

AA503

Fasson®

PET PT WHITE
S692N-BG45WH FSC

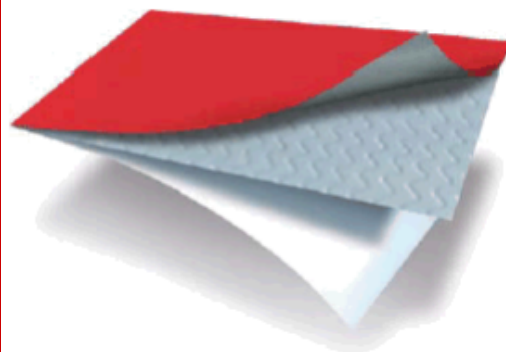

PET WHITE PT

S692N

BG45WH FSC



The mark of
responsible forestry

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2026 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.