

#### Facestock

Imprintable matt silver polyester film, with a special absorbent surface coating, void printed.

Basis Weight	76 g/m <sup>2</sup>	ISO 536
Caliper	60 µm	ISO 534

#### Adhesive

A permanent, acrylic based adhesive.

#### Liner

Hygroflat 100 FSC, a one side coated, bleached kraft paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	100 g/m <sup>2</sup>	ISO 536
Caliper	108 µm	ISO 534

#### Laminate

Total Caliper	184 µm±10%	ISO 534
---------------	------------	---------

#### Performance Data

Initial Tack	11 N/25mm	FTM 9 Glass
Peel Adhesion 90°	9 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-40 °C to 90 °C	

#### Adhesive Performance

The adhesive is perfectly suitable for uses that need a good resistance to UV, fats or solvents. Good general adhesion performance on a wide range of substrates.

#### Applications and Use

Once applied to the substrate on removal, an irreversible "void" footprint message - formerly invisible to the eye - will detach itself from the face film. Labels which have been removed cannot be reapplied since repositioning will leave visible proof that tampering has taken place.

The hygroflat backing paper is specially suited to the more critical refolding demands of high-speed computer printers, providing optimum layflatness and excellent interfolding characteristics.

#### Conversion and Printing

Printable by all conventional printing techniques such as Rotogravure, Flexography, Letter press, Silk screen, UV cure, Laser. Thermal Transfer printing is subject to ribbon compatibility.


#### Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

## AA541

### Fasson ®

#### ZZ VOID PET50 MATT SILV S697-HF100 FSC

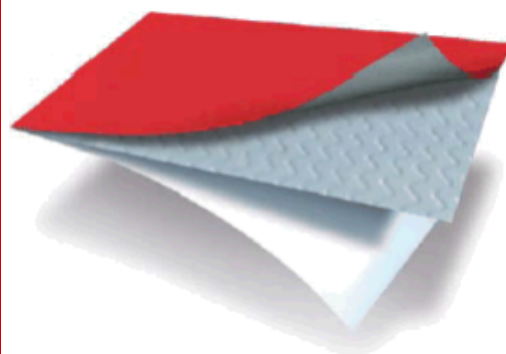

ZZ VOID PET50 MATT SILV

S697

HF100 FSC



The mark of  
responsible forestry

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

## Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000



### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2025 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.