

Facestock

A white, one side machine coated, woodfree printing paper with semi-gloss appearance.

The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

| | | |
|--------------|---------------------|---------|
| Basis Weight | 77 g/m ² | ISO 536 |
| Caliper | 66 µm | ISO 534 |

Adhesive

A general purpose permanent, acrylic based adhesive.

Liner

A clear polyester liner giving optimum smoothness to the adhesive layer. rPET30 liner contains 30% Post-Consumer Recycled (PCR) content. This liner is 100% recyclable. Visit our website for more information.

| | | |
|--------------|---------------------|---------|
| Basis Weight | 42 g/m ² | ISO 536 |
| Caliper | 30 µm | ISO 534 |

Laminate

| | | |
|---------------|------------|---------|
| Total Caliper | 109 µm±10% | ISO 534 |
|---------------|------------|---------|

Performance Data

| | | |
|------------------------|-----------------|--------------|
| Initial Tack | 15 N/25mm | FTM 9 Glass |
| Peel Adhesion 90° | 8 N/25mm | FTM 2 St.St. |
| Min. Application Temp. | 5 °C | |
| Service Temperature | -20 °C to 80 °C | |

Adhesive Performance

The adhesive is characterized by a high initial tack, excellent adhesion and good low temperature performance on a wide variety of substrates.

Applications and Use

The products are suitable for a wide range of promotional and industrial label applications where attractive semi-gloss appearance in multi-colour work is required.

Automatic application: The robust film liner allows for consistent, snap free, application on high speed lines.

Conversion and Printing


Facestock is suitable for solid and halftone images and text printing by letterpress, flexo (UV and waterbased) offset and screen processes. Hot and cold foil stamping, varnishing and variable imprinting with thermal transfer are also suitable for this product.

As the liner is transparent, the applicator must detect the print itself or registration marks must be provided on either face or liner. Press stability is good with stable, consistent register during conversion. Flat bed performance is good while solid and magnetic rotary dies need additional care. (Die bearers must be adjusted to the polyester liner). The PCR content gives a transparent light blue/grey shade to the liner. This does not affect the performance; performance is on par with conventional PET liners.

AD558

Fasson ®

MC PRIMECOAT FSC S2000N-rPET30

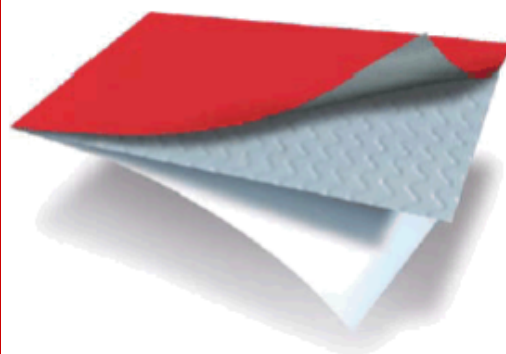

MC PRIMECOAT FSC

S2000N

rPET30



The mark of
responsible forestry

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Compliance and Approvals

The adhesive S2000N is suitable for contact with dry, moist, and fatty foodstuffs that have a reduction factor of 4 or higher in this construction. For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.

Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2025 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.