

#### Facestock

A bright metallised on the print side bi-axially oriented, polypropylene film with a print-receptive topcoat.

Basis Weight	47 g/m <sup>2</sup>	ISO 536
Caliper	51 µm	ISO 534

#### Adhesive

A general purpose permanent, acrylic based adhesive.

#### Liner

BG40 white, a supercalendered glassine paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	57 g/m <sup>2</sup>	ISO 536
Caliper	51 µm	ISO 534

#### Laminate

Total Caliper	117 µm±10%	ISO 534
---------------	------------	---------

#### Performance Data

Initial Tack	10 N/25mm	FTM 9 Glass
Peel Adhesion 90°	6 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-20 °C to 80 °C	

#### Adhesive Performance

S692N is a clear permanent adhesive featuring excellent UV resistance and weatherability together with good adhesion performance, even on apolar substrates.

#### Applications and Use

Applications are predominantly in market segments where rigid containers are used (e.g. Glass, PET). Applications include luxury products such as spirits, home and personal care, automotive lubricants, where eye catching high quality labels are required. Due to fairly rigid nature of the film care should be taken with use on non-uniform surfaces and where a very high level of squeezability is desired.

#### Conversion and Printing

The top coated metallised film can be printed by conventional printing techniques including flexo, screen, offset, letterpress, silkscreen, gravure, and hot or cold foiling processes. This film is also qualified for digital printing with Xeikon technology. UV, water-based and solvent-based inks can be used. The topcoat is designed for optimal ink adhesion. On-press corona treatment is not advised. The face material is suitable for Thermal Transfer printing. Exact inks, foils and ribbons should be specified by your ink/foil/ribbon supplier. The material has very good register properties especially when a high number of different colours are used. In circumstances where high scuff resistance is required, over varnish or over lamination of the printed labels is advised.


#### Compliance and Approvals

The adhesive S692N is suitable for contact with dry, moist and fatty foodstuffs with a reduction factor of 3 or higher in this construction. For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.

## AN884

### Fasson ®

#### PP50 TOP GLOSS SILVER S692N-BG40WH FSC

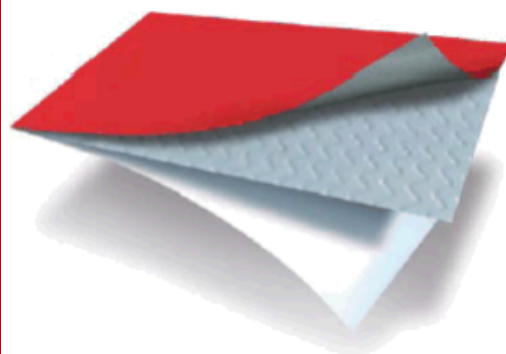

PP50 TOP GLOSS SILVER

S692N

BG40WH FSC



The mark of  
responsible forestry

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

### Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

### Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000



### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2024 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.