

Facestock

A white bi-axially oriented polypropylene film with a print-receptive matt topcoat.

Basis Weight	50 g/m ²	ISO 536
Caliper	57 µm	ISO 534

Adhesive

A general purpose permanent, acrylic based adhesive.

Liner

rBG40 White, a siliconized supercalendered glassine paper, contains 15% post-consumer waste. Being produced with recycled material, there is a possible higher incidence of impurities, visible fibers and slight variation in tone.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	54 g/m ²	ISO 536
Caliper	47 µm	ISO 534

Laminate

Total Caliper	123 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	10 N/25mm	FTM 9 Glass
Peel Adhesion 90°	6 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-20 °C to 80 °C	

Adhesive Performance

S692N is a clear permanent adhesive featuring excellent UV resistance and weatherability together with good adhesion performance, even on apolar substrates.

S692N in combination with polyolefin face materials (PE85, PP, Global MDO) is approved by Recyclclass as fully compatible with the rigid HDPE recycling stream.

Applications and Use

Applications are predominantly in market segments where rigid containers are used (e.g. Glass, PET). Due to fairly rigid nature of the film care should be taken with use on non-uniform surfaces.


Conversion and Printing

The product features matt topcoat that enables good printability and high speed conversion in conventional and digital printing. The topcoat is designed for optimum ink adhesion. The material has excellent register properties especially when a high number of different colours is used. On-press corona treatment is not advised. The face material is suitable for Thermal Transfer (TT) printing. Exact inks, foils and ribbons should be specified by your ink/foil/ribbon supplier. According to internal testing best TT printing results are achieved with Wax & Wax/Resin ribbons. Care should be taken when applying cold foil; we recommend underprinting with a white ink layer for optimum result. Digital: this product is qualified with Xeikon dry-toner print technology and shows also good image quality in UV Inkjet printing. Care should be taken when printing small text; we recommend underprinting with solid colour e.g. white, to improve small text sharpness when printing with UV Inkjet.

BJ310

Fasson ®

PP60 MATT TOP WHITE S692N-rBG40WH FSC

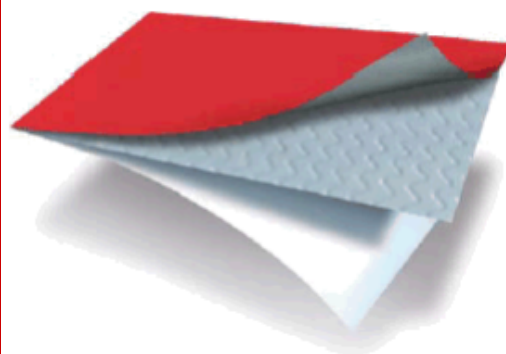

PP60 MATT TOP WHITE

S692N

rBG40WH FSC



The mark of
responsible forestry

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Compliance and Approvals

The adhesive S692N is suitable for contact with dry, moist and fatty foodstuffs with a reduction factor of 3 or higher in this construction.

For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.

Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2026 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.